

# TEMPETEST®

CAT NO. 223

## Exclusively Distributed By





### High Performance Outdoor Fabrics





#### WARRANTY:

Tempotest Home® fabrics have a warranty of 6 years. The warranty only covers loss of colour and tenacity, due to the normal exposure to the action of UV rays and weather conditions in general. Conditions of warranty available at TEMPOTEST.IT.



#### MADE IN ITALY

## WASH CARE


Le macchie sui tessuti delle collezioni Tempotest Home® possono essere eliminate con una semplice soluzione di acqua (non più di 40°) e sapone, spazzolando e risciacquando accuratamente. È possibile lavare i tessuti a secco o in lavatrice a 30° con detersivo liquido e con centrifuga blanda. Lasciare asciugare il tessuto all'aria aperta. Non asciugare con apparecchi elettrici e non stirare con vapore. Il trattamento delle macchie a base acquosa così come l'igienizzazione dei tessuti Tempotest Home® possono essere effettuati anche con una soluzione di candeggina (ipoclorito di sodio) – non candeggina delicata – diluendo 1 parte di candeggina in 4 parti di acqua. Dopo questo trattamento è sempre necessario risciacquare accuratamente il tessuto e lasciarlo asciugare all'ombra per



Non strizzare o torcere - Do not wring or twist

Stains on Tempotest Home® fabrics c n be removed with a solution of water (not more than 40°C) and neutral soap, brushing and rinsing thoroughly. It is possible to dry wash the fabric or in washing machine at 30°C with liquid detergent. Use low speed spindryer. Let dry the fabric at the open air. Do not dry with electrical appliances and do not iron with steam. Water-based stains treatment and Tempotest Home® fabrics sanitizing, can also be done with a solution of bleach containing sodium hypochlorite – not gentle bleach - diluted 1 part bleach to 4 parts water. After this treatment, it is always necessary to rinse the fabric thoroughly and then let it dry in the shade to avoid any yellowing


## MADE IN ITALY

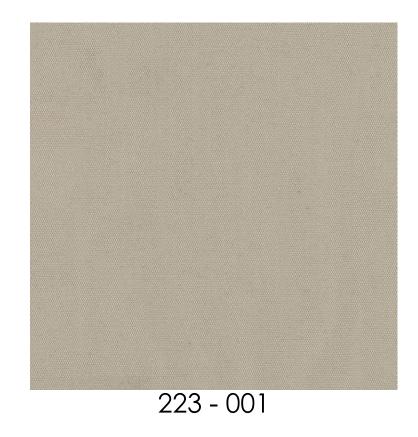

SUITABLE FOR: OUTDOOR UPHOLSTERY & SOFT UPHOLSTERY COMPOSITION: 100% SOLUTION DYED OUTDOOR ACRYLIC FIBRE WIDTH: 152 CMS (+/- 5 CMS) WEIGHT: 270 GSM (+/- 5%) COLOUR FASTNESS TO ARTIFICIAL WEATHERING UNI EN ISO 105 BO4: DEGREE ≥ 7/8 ON BLUE SCALE, DEGREE ≥ 4/5 ON GREY SCALE, AFTER 1000 HRS OF EXPOSURE GUARANTEE: 6 YEARS COLOURS-FAST WARRANTY FINISHING: PFAS FREE - SOIL RESISTANT, MOULD RESISTANT, WATER REPELLENT & OIL CLEANABLE WASH CARE: PLEASE REFER TO PAGE 3

\*Colour shades may tend to vary between different dye-lots & production batches \*Due to variations in computer screens, images presented are not 100% similar to actual fabrics



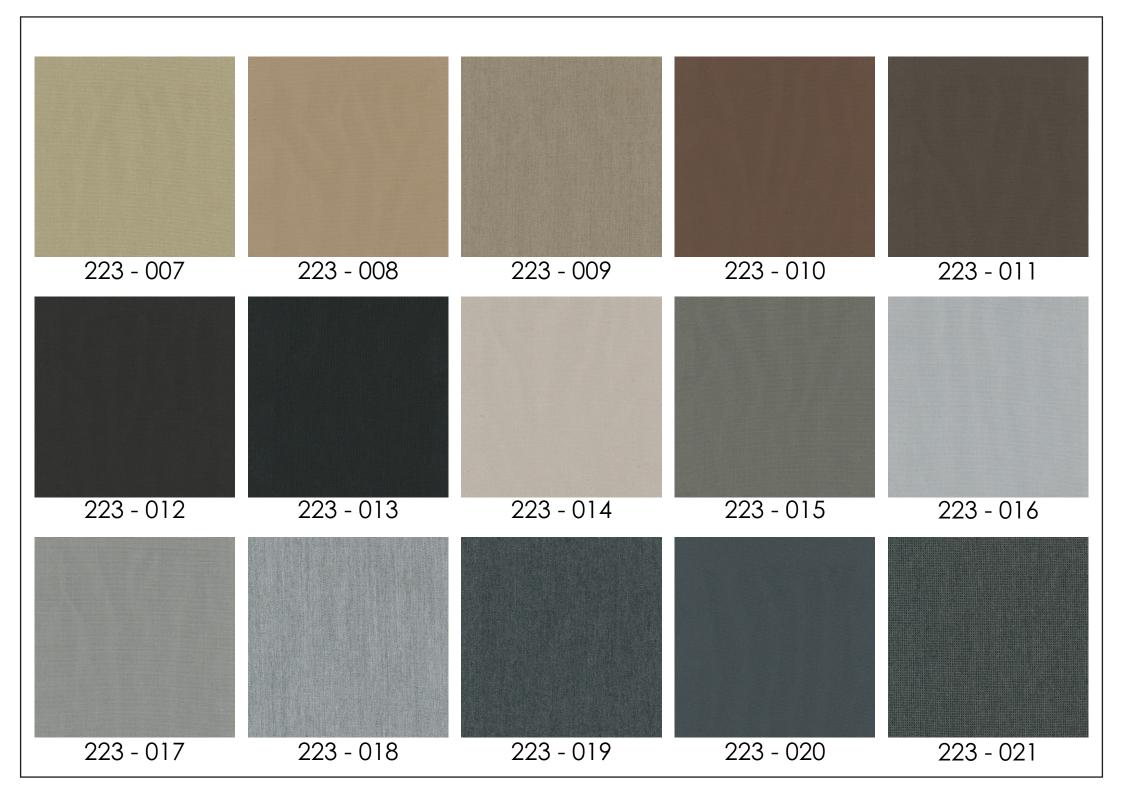









SUITABLE FOR: OUTDOOR UPHOLSTERY & SOFT UPHOLSTERY COMPOSITION: 100% SOLUTION DYED OUTDOOR ACRYLIC FIBRE WIDTH: 145 CMS (+/- 5 CMS) WEIGHT: 300 GSM (+/- 5%) COLOUR FASTNESS TO ARTIFICIAL WEATHERING UNI EN ISO 105 BO4: DEGREE ≥ 7/8 ON BLUE SCALE, DEGREE ≥ 4/5 ON GREY SCALE, AFTER 1000 HRS OF EXPOSURE GUARANTEE: 6 YEARS COLOURS-FAST WARRANTY FINISHING: PFAS FREE - SOIL RESISTANT, MOULD RESISTANT, WATER REPELLENT & OIL CLEANABLE WASH CARE: PLEASE REFER TO PAGE 3

\*Colour shades may tend to vary between different dye-lots & production batches \*Due to variations in computer screens, images presented are not 100% similar to actual fabrics










SUITABLE FOR: OUTDOOR UPHOLSTERY & SOFT UPHOLSTERY COMPOSITION: 100% SOLUTION DYED OUTDOOR ACRYLIC FIBRE WIDTH: 145 CMS (+/- 5 CMS) WEIGHT: 280 GSM (+/- 5%) COLOUR FASTNESS TO ARTIFICIAL WEATHERING UNI EN ISO 105 BO4: DEGREE ≥ 7/8 ON BLUE SCALE, DEGREE ≥ 4/5 ON GREY SCALE, AFTER 1000 HRS OF EXPOSURE GUARANTEE: 6 YEARS COLOURS-FAST WARRANTY FINISHING: PFAS FREE - SOIL RESISTANT, MOULD RESISTANT, WATER REPELLENT & OIL CLEANABLE WASH CARE: PLEASE REFER TO PAGE 3

\*Colour shades may tend to vary between different dye-lots & production batches \*Due to variations in computer screens, images presented are not 100% similar to actual fabrics

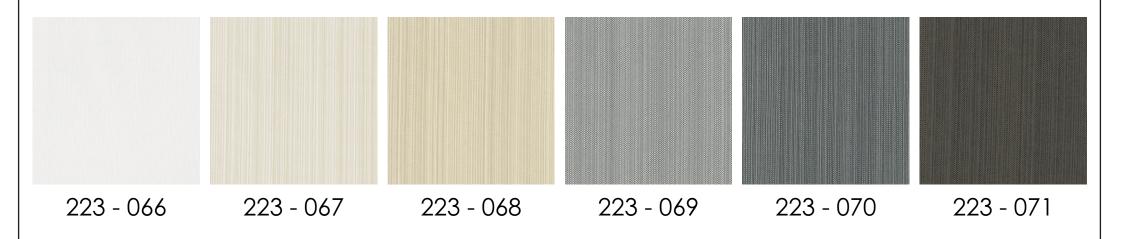



223 - 072

SUITABLE FOR: OUTDOOR UPHOLSTERY & SOFT UPHOLSTERY COMPOSITION: 100% SOLUTION DYED OUTDOOR ACRYLIC FIBRE WIDTH: 152 CMS (+/- 5 CMS) WEIGHT: 270 GSM (+/- 5%) COLOUR FASTNESS TO ARTIFICIAL WEATHERING UNI EN ISO 105 BO4: DEGREE ≥ 7/8 ON BLUE SCALE, DEGREE ≥ 4/5 ON GREY SCALE, AFTER 1000 HRS OF EXPOSURE GUARANTEE: 6 YEARS COLOURS-FAST WARRANTY FINISHING: PFAS FREE - SOIL RESISTANT, MOULD RESISTANT, WATER REPELLENT & OIL CLEANABLE WASH CARE: PLEASE REFER TO PAGE 3

\*Colour shades may tend to vary between different dye-lots & production batches \*Due to variations in computer screens, images presented are not 100% similar to actual fabrics



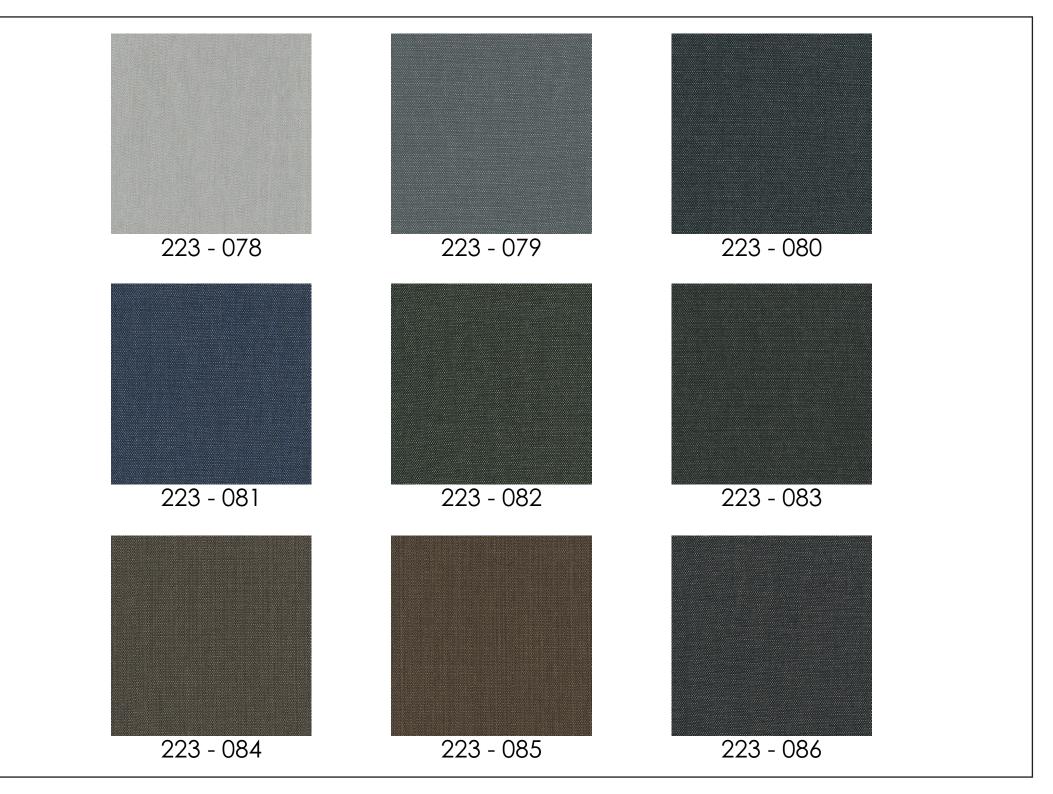


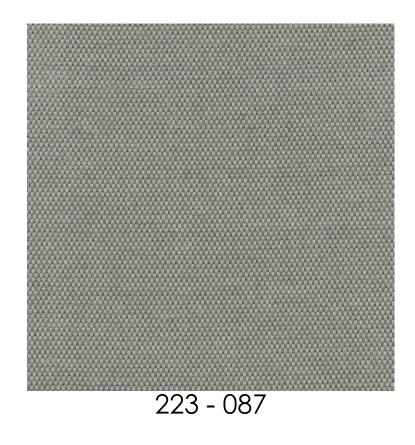


SUITABLE FOR: OUTDOOR UPHOLSTERY & SOFT UPHOLSTERY COMPOSITION: 100% SOLUTION DYED OUTDOOR ACRYLIC FIBRE WIDTH: 145 CMS (+/- 5 CMS) WEIGHT: 380 GSM (+/- 5%) COLOUR FASTNESS TO ARTIFICIAL WEATHERING UNI EN ISO 105 BO4: DEGREE ≥ 7/8 ON BLUE SCALE, DEGREE ≥ 4/5 ON GREY SCALE, AFTER 1000 HRS OF EXPOSURE GUARANTEE: 6 YEARS COLOURS-FAST WARRANTY FINISHING: PFAS FREE - SOIL RESISTANT, MOULD RESISTANT, WATER REPELLENT & OIL CLEANABLE WASH CARE: PLEASE REFER TO PAGE 3

\*Colour shades may tend to vary between different dye-lots & production batches \*Due to variations in computer screens, images presented are not 100% similar to actual fabrics




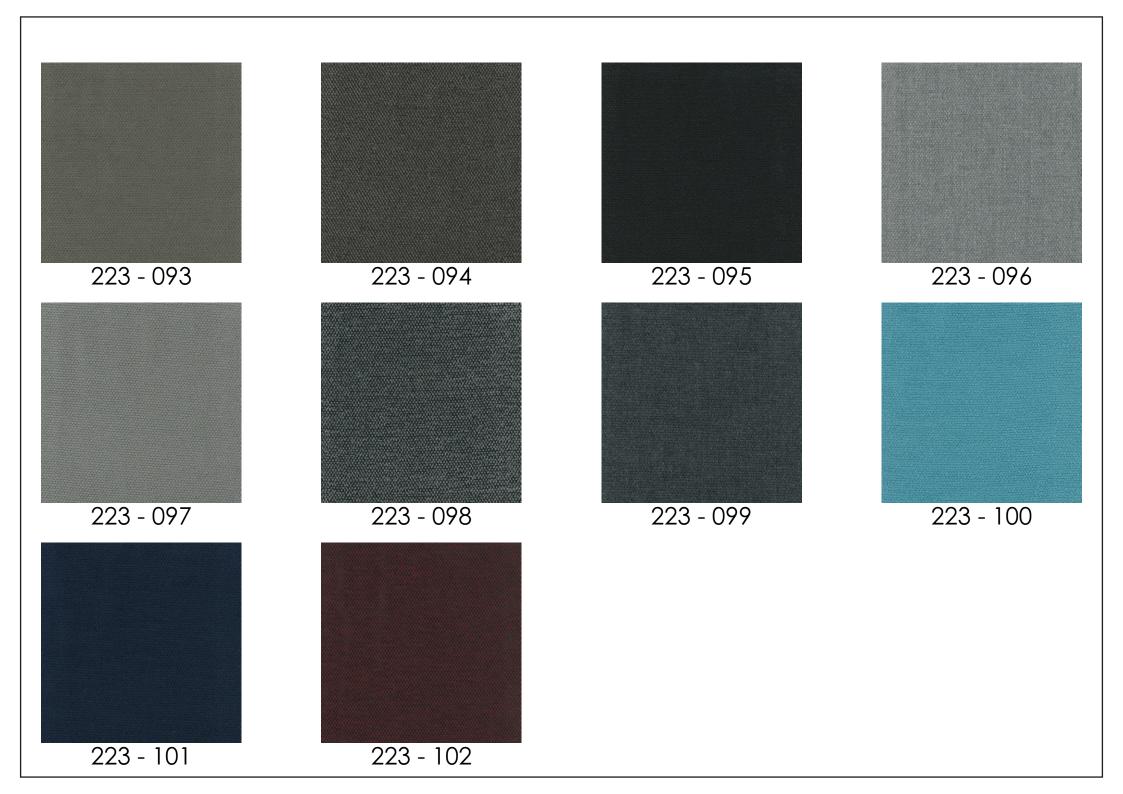


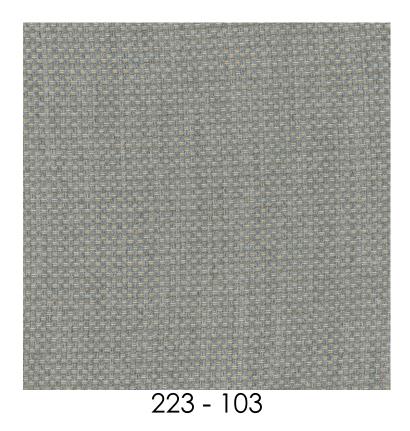



SUITABLE FOR: OUTDOOR UPHOLSTERY & SOFT UPHOLSTERY COMPOSITION: 100% SOLUTION DYED OUTDOOR ACRYLIC FIBRE WIDTH: 145 CMS (+/- 5 CMS) WEIGHT: 360 GSM (+/- 5%) COLOUR FASTNESS TO ARTIFICIAL WEATHERING UNI EN ISO 105 BO4: DEGREE ≥ 7/8 ON BLUE SCALE, DEGREE ≥ 4/5 ON GREY SCALE, AFTER 1000 HRS OF EXPOSURE GUARANTEE: 6 YEARS COLOURS-FAST WARRANTY FINISHING: PFAS FREE - SOIL RESISTANT, MOULD RESISTANT, WATER REPELLENT & OIL CLEANABLE WASH CARE: PLEASE REFER TO PAGE 3


\*Colour shades may tend to vary between different dye-lots & production batches \*Due to variations in computer screens, images presented are not 100% similar to actual fabrics

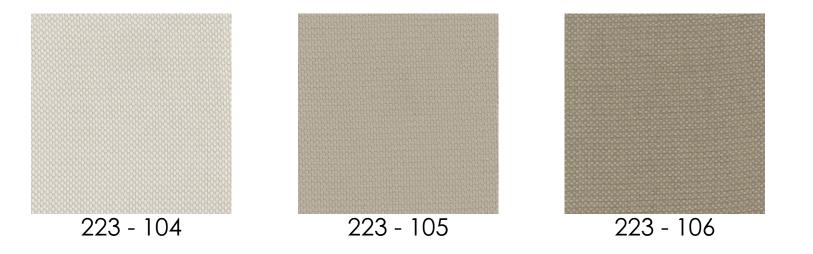



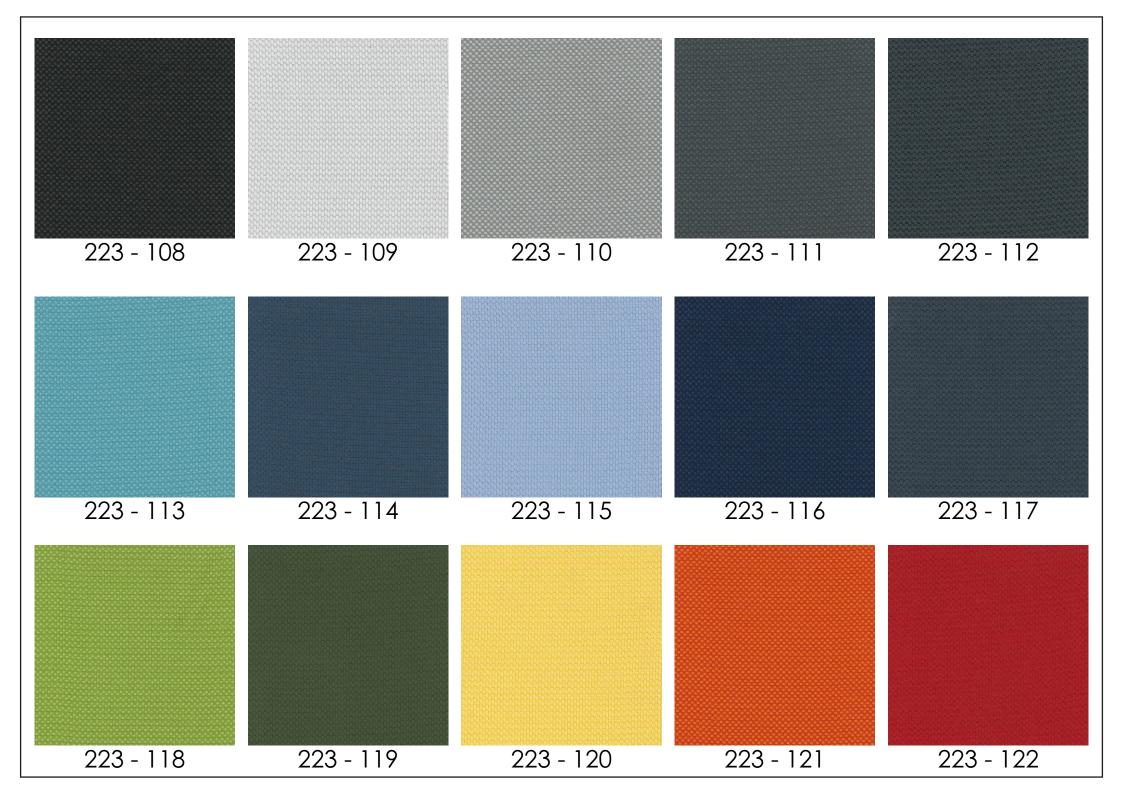

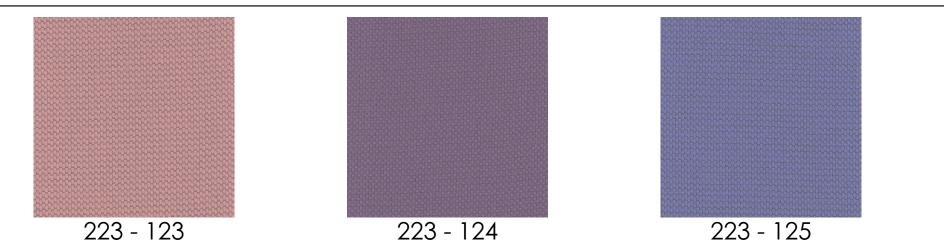

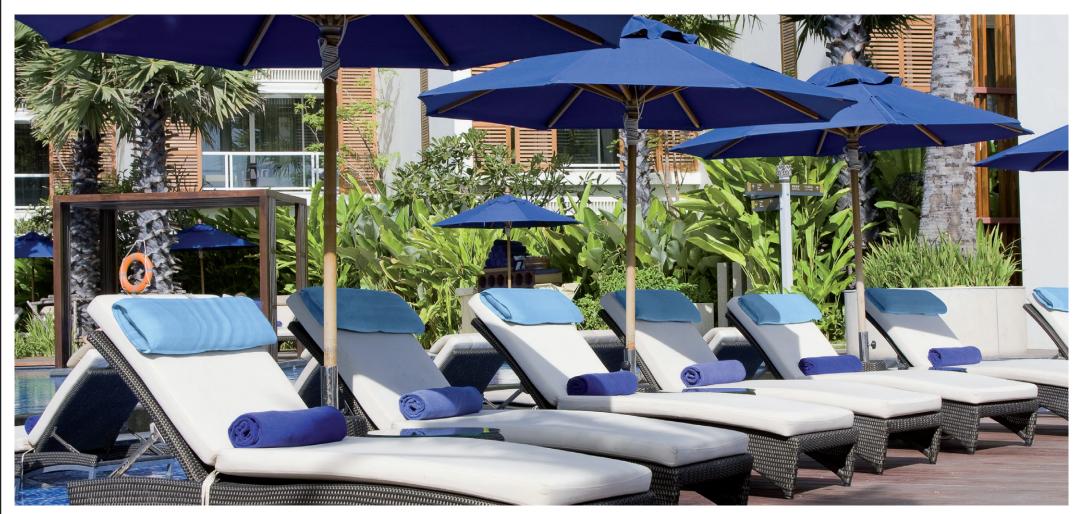



SUITABLE FOR: OUTDOOR SHEER

**COMPOSITION: 100% SOLUTION DYED OUTDOOR ACRYLIC FIBRE** 

WIDTH: 316 CMS (+/- 5 CMS) WEIGHT: 120 GSM (+/- 5%)

COLOUR FASTNESS TO ARTIFICIAL WEATHERING UNI EN ISO 105 BO4: DEGREE ≥ 7/8 ON BLUE SCALE, DEGREE ≥ 4/5

ON GREY SCALE, AFTER 1000 HRS OF EXPOSURE

**GUARANTEE:** 8 YEARS COLOURS-FAST WARRANTY

FINISHING: SOIL RESISTANT, MOULD RESISTANT, WATER REPELLENT & OIL CLEANABLE

WASH CARE: PLEASE REFER TO PAGE 20

\*Colour shades may tend to vary between different dye-lots & production batches

\*Due to variations in computer screens, images presented are not 100% similar to actual

fabrics

#### **TECHNICAL FEATURES**

Width ±5% (CMS) 316 Weight ±5% (GSM) 120 Composition 100% solution dyed outdoor acrylic fibre Color fastness to artificial weathering UNI EN ISO 105 B04 Degree ≥ 7/8 on Blue scale Degree ≥ 4/5 on Grey scale After 1000 HRS of exposure Guarantee 8-years colours-fast warranty Finishing Soil resistant, mould resistant, water repellent & oil cleanable.

Maintenance and cleaning



Stains on Tempotest Home® fabrics can be removed with a solution of water (not more than 40°C) and neutral soap, brushing and rinsing thoroughly. It is possible to dry wash the fabric or in washing machine at 30°C with liquid detergent. Use low speed spin-dryer. Let dry the fabric at the open air. Do not dry with electrical appliances and do not iron with steam.

## **Tempotest Home® Sheer**

Airy and elegant, Tempotest Home® Sheer is **the ideal solution for decoration**. An open mesh fabric, perfect for screening the sun's rays without occluding the view, and **creates a pleasant atmosphere**.

Suitable for vertical shading of outdoor facilities such as pergolas and gazebos, and to enhance boring and impersonal environments with swags, ceilings and drapes; or as curtains for windows and balconies **increasing visual comfort and privacy of living areas**.

**Resistant to mould, mildew and salt,** Tempotest Home<sup>®</sup> Sheer **keeps its beauty without needing complicated maintenance** or frequent washing.

Tempotest Home<sup>®</sup> Sheer also **preserves its colour and brilliance** without colour fading or yellowing **even when subjected to strong UV rays** and the most demanding weathering which would damage any other type of fabric in a short time.

Sheer is water repellent and oil cleanable, allowing the water to slip taking away any accumulation of dirt.

The water repellency, combined with the open and light structure helps a rapid drying preventing drapes and decors to become heavy and mis-shapen. Tempotest Home<sup>®</sup> Sheer provides **good protection against insects.** 

#### WARRANTY

Tempotest Home<sup>®</sup> Sheer fabrics are guaranteed 8 years. The warranty only covers loss of colour and tenacity, due to the normal exposure to the action of UV rays and weather conditions in general





SUITABLE FOR: OUTDOOR UPHOLSTERY & SOFT UPHOLSTERY COMPOSITION: 100% SOLUTION DYED OUTDOOR ACRYLIC FIBRE WIDTH: 152 CMS (+/- 5 CMS) WEIGHT: 270 GSM (+/- 5%) COLOUR FASTNESS TO ARTIFICIAL WEATHERING UNI EN ISO 105 BO4: DEGREE ≥ 7/8 ON BLUE SCALE, DEGREE ≥ 4/5 ON GREY SCALE, AFTER 1000 HRS OF EXPOSURE GUARANTEE: 6 YEARS COLOURS-FAST WARRANTY FINISHING: PFAS FREE - SOIL RESISTANT, MOULD RESISTANT, WATER REPELLENT & OIL CLEANABLE WASH CARE: PLEASE REFER TO PAGE 3

\*Colour shades may tend to vary between different dye-lots & production batches \*Due to variations in computer screens, images presented are not 100% similar to actual fabrics







TEMPETEST®

## PARA.ULTRAFABRICS.AE